


Závěsné oko s přechodními články ZHVL

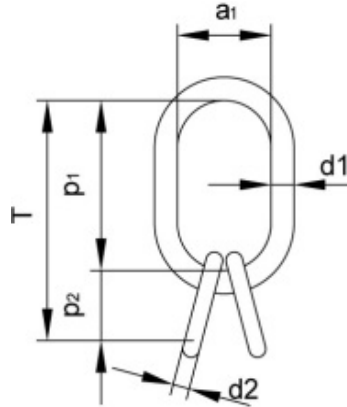

Model	WLL [t]	Rozměry [mm]						Hmotnost [kg/ks]
		d ₁	p ₁	a ₁	d ₂	p ₂	a ₂	
ZHVL 16/13	1,00	16	110	60	13	110	60	1,21
ZHVL 16/16	1,80	16	110	60	16	110	60	1,59
ZHVL 18/16	2,65	18	135	75	16	110	60	1,86
ZHVL 22/18	4,50	22	160	90	18	135	75	3,10
ZHVL 26/22	7,50	26	180	100	22	160	90	5,30
ZHVL 32/26	9,00	32	200	110	26	180	100	8,50
ZHVL 36/32	10,50	36	260	140	32	200	110	14,15
ZHVL 36/36	12,50	36	260	140	36	260	140	19,05
SG-16-8	20,50	38	275	150	33	230	130	17,05
TG-20-8	26,90	45	340	180	38	275	150	27,79
TG-22-8	40,00	50	350	190	45	340	180	42,19
TG-26-8	52,50	60	400	200	50	350	190	60,12

- pevnostní třída 8
- povrchová úprava červenou práškovou barvou
- dodávají se s certifikátem EN 10204 3.1